

Digital Signage

Indoor

High Brightness

FunFactory

Indoor Digital Signage Solution

Proposals for various displays

Indoor installation

High Brightness Double-sided Window Facing Kiosk

室内用 高輝度両面

ショーウィンドウ用モニター

EKOADH9 55inch



デジタル サイネージ ディスプレイの機能性と美学に重点を置いた両面高輝度デジタル サイネージは、モダンで親しみやすく、実用的で、日常使用の厳しさに耐えるように設計されています。

両面高輝度デジタル サイネージは、店舗、銀行、商業ビル、およびその他の多くのデジタル サイネージ アプリケーションを、最大 3000 nit の明るさの屋外向けディスプレイに変えることができます。特殊な超高輝度パネルを使用し、表面の高温に耐えることができ、黒化欠陥が発生せず、ウィンドウ ディスプレイの両面高輝度デジタル サイネージに最適です。

- ✓55インチ
- ✓3000nits+1000nits両面高輝度デジタルサイネージ
- ✓スリム&ベゼルレスデザイン
- ✓高温液晶パネル
- ✓コンテンツ付きAndroidシステム
- ✓スマートな明るさコントロール
- ✓温度調節モジュール内蔵



3000nits+1000nits
High Brightness



Android system with
content management system



Loop
Playback



Slim and Bezelless
Design



Built-in temperature
Control module




Auto
Brightness

DOUBLE SIDE WINDOW FACING DISPLAYS



PRODUCTS BRIGHTNESS


Perfect for window displays thanks to the 3000nits brightness on one side and 1000nits on the other.


3000
Nits




A

B


1000
Nits

Slim Bezel Design

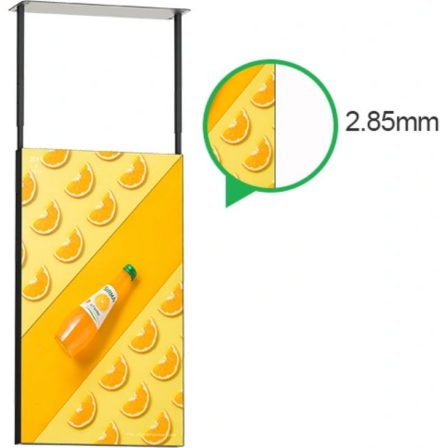


2.85mm

AUTO BRIGHTNESS CONTROL

Brightness would be auto adjust via the ambient light



HORIZONTAL AND VERTICAL SCREEN SWITCHING




TEMPERATURE CONTROL

The temperature modules can intelligent control the fan speed, when high temperature, the fan will high speed, when low temperature, the fan will low speed;

Real-time view of the temperature of our window facing display, so that we can know whether the ambient temperature is qualified.





It supports customized playing programs and on-off time in different periods.



Indoor Digital Signage Solution

SPECIFICATIONS

| SPECIFICATION | | 55" |
|------------------------|-----------------------------------------------------------|-----------------------|
| PANEL | Active area | 1209×680 |
| | Aspect Ratio | 16:09 |
| | Native Resolution | 1,920 x 1,080 |
| | Brightness | 3000 cd/m2 +1000cd/m2 |
| | Contrast Ratio | 1200:1 |
| | Viewing Angle | 178 / 178 |
| | Response Time | Typ. 9.5ms |
| | Life Time (Typ.) | 30,000 Hrs |
| | Orientation | Portrait & Landscape |
| OPERATING SYSTEM | Android System 7.1; CPU :RK3288; RAM:2G;ROM:16G;WIFI/RJ45 | |
| ENVIRONMENT CONDITIONS | Operation Temperature | 0°C to 50 °C |
| | Storage System | -20°C to 60 °C |
| POWER | Power Supply | 100-240V~, 50/60Hz |
| | Power Type | Built-In Power |
| SOFTWARE COMPATIBLIT | SOFTWARE | Yes(CMS, Control) |



製造
Shenzhen STARVISUAL DISPLAY
中国 深セン



国内販売
株式会社ファン・ファクトリー
〒192-0082 東京都八王子市東町5-5ハルズ八王子ビル8F
TEL 042-631-1316 FAX 042-631-1317
<http://www.funfactory.co.jp/planning@funfactory.co.jp>